

4 Installation from sources

You can get the very latest version of Zabbix by compiling it from the sources.

A step-by-step tutorial for installing Zabbix from the sources is provided here.

1 Installing Zabbix daemons

1 Download the source archive

Go to the [Zabbix download page](#) and download the source archive. Once downloaded, extract the sources, by running:

```
$ tar -zxvf zabbix-3.0.0.tar.gz
```

Enter the correct Zabbix version in the command. It must match the name of the downloaded archive.

2 Create user account

For all of the Zabbix daemon processes, an unprivileged user is required. If a Zabbix daemon is started from an unprivileged user account, it will run as that user.

However, if a daemon is started from a 'root' account, it will switch to a 'zabbix' user account, which must be present. To create such a user account (in its own group, "zabbix") on Linux systems, run:

```
groupadd zabbix  
useradd -g zabbix zabbix
```

A separate user account is not required for Zabbix frontend installation.

If Zabbix [server](#) and [agent](#) are run on the same machine it is recommended to use a different user for running the server than for running the agent. Otherwise, if both are run as the same user, the agent can access the server configuration file and any Admin level user in Zabbix can quite easily retrieve, for example, the database password.

Running Zabbix as root, bin, or any other account with special rights is a security risk.

3 Create Zabbix database

For Zabbix [server](#) and [proxy](#) daemons, as well as Zabbix frontend, a database is required. It is not needed to run Zabbix [agent](#).

SQL [scripts are provided](#) for creating database schema and inserting the dataset. Zabbix proxy database needs only the schema while Zabbix server database requires also the dataset on top of the schema.

Having created a Zabbix database, proceed to the following steps of compiling Zabbix.

4 Configure the sources

When configuring the sources for a Zabbix server or proxy, you must specify the database type to be used. Only one database type can be compiled with a server or proxy process at a time.

To see all of the supported configuration options, inside the extracted Zabbix source directory run:

```
./configure --help
```

To configure the sources for a Zabbix server and agent, you may run something like:

```
./configure --enable-server --enable-agent --with-mysql --enable-ipv6 --  
with-net-snmp --with-libcurl --with-libxml2
```

--with-libxml2 configuration option is required for virtual machine monitoring, supported since Zabbix 2.2.0.

To configure the sources for a Zabbix server (with PostgreSQL etc.), you may run:

```
./configure --enable-server --with-postgresql --with-net-snmp
```

To configure the sources for a Zabbix proxy (with SQLite etc.), you may run:

```
./configure --prefix=/usr --enable-proxy --with-net-snmp --with-sqlite3 --  
with-ssh2
```

To configure the sources for a Zabbix agent, you may run:

```
./configure --enable-agent
```

You may use the --enable-static flag to statically link libraries. If you plan to distribute compiled binaries among different servers, you must use this flag to make these binaries work without required libraries. Note that --enable-static [does not work under Solaris](#).

Using --enable-static option is not recommended when building server.

In order to build the server statically you must have a static version of every external library needed. There is no strict check for that in configure script.

Command-line utilities zabbix_get and zabbix_sender are compiled if --enable-agent option is used.

Use --with-ibm-db2 flag to specify location of the CLI API.

Use --with-oracle flag to specify location of the OCI API.

For encryption support see [Compiling Zabbix with encryption support](#)

5 Make and install everything

If installing from SVN, it is required to run first:

```
$ make dbschema
```

```
make install
```

This step should be run as a user with sufficient permissions (commonly 'root', or by using sudo).

Running `make install` will by default install the daemon binaries (`zabbix_server`, `zabbix_agentd`, `zabbix_proxy`) in `/usr/local/sbin` and the client binaries (`zabbix_get`, `zabbix_sender`) in `/usr/local/bin`.

To specify a different location than `/usr/local`, use a `--prefix` key in the previous step of configuring sources, for example `--prefix=/home/zabbix`. In this case daemon binaries will be installed under `<prefix>/sbin`, while utilities under `<prefix>/bin`. Man pages will be installed under `<prefix>/share`.

6 Review and edit configuration files

- edit the Zabbix agent configuration file **`/usr/local/etc/zabbix_agentd.conf`**

You need to configure this file for every host with `zabbix_agentd` installed.

You must specify the Zabbix server **IP address** in the file. Connections from other hosts will be denied.

- edit the Zabbix server configuration file **`/usr/local/etc/zabbix_server.conf`**

You must specify the database name, user and password (if using any).

With SQLite the full path to database file must be specified; DB user and password are not required.

The rest of the parameters will suit you with their defaults if you have a small installation (up to ten monitored hosts). You should change the default parameters if you want to maximize the performance of Zabbix server (or proxy) though. See the [performance tuning](#) section for more details.

- if you have installed a Zabbix proxy, edit the proxy configuration file **`/usr/local/etc/zabbix_proxy.conf`**

You must specify the server IP address and proxy hostname (must be known to the server), as well as the database name, user and password (if using any).

With SQLite the full path to database file must be specified; DB user and password are not required.

7 Start up the daemons

Run `zabbix_server` on the server side.

```
shell> zabbix_server
```

Make sure that your system allows allocation of 36MB (or a bit more) of shared memory, otherwise the server may not start and you will see "Cannot allocate shared memory for <type of cache>." in the server log file. This may happen on FreeBSD, Solaris 8.

See the "[See also](#)" section at the bottom of this page to find out how to configure shared memory.

Run `zabbix_agentd` on all the monitored machines.

```
shell> zabbix_agentd
```

Make sure that your system allows allocation of 2MB of shared memory, otherwise the agent may not start and you will see “Cannot allocate shared memory for collector.” in the agent log file. This may happen on Solaris 8.

If you have installed Zabbix proxy, run zabbix_proxy.

```
shell> zabbix_proxy
```

2 Installing Zabbix web interface

Copying PHP files

Zabbix frontend is written in PHP, so to run it a PHP supported webserver is needed. Installation is done by simply copying the PHP files from frontends/php to the webserver HTML documents directory.

Common locations of HTML documents directories for Apache web servers include:

- /usr/local/apache2/htdocs (default directory when installing Apache from source)
- /srv/www/htdocs (OpenSUSE, SLES)
- /var/www/html (Fedora, RHEL, CentOS)
- /var/www (Debian, Ubuntu)

It is suggested to use a subdirectory instead of the HTML root. To create a subdirectory and copy Zabbix frontend files into it, execute the following commands, replacing the actual directory:

```
mkdir <htdocs>/zabbix  
cd frontends/php  
cp -a . <htdocs>/zabbix
```

If installing from SVN and planning to use any other language than English, you must generate translation files. To do so, run:

```
locale/make_mo.sh
```

msgfmt utility from gettext package is required.


Additionally, to use any other language than English, its locale should be installed on the web server. See the "[See also](#)" section in the “User profile” page to find out how to install it if required.

Installing frontend

Step 1


In your browser, open Zabbix URL: http://<server_ip_or_name>/zabbix

You should see the first screen of the frontend installation wizard.

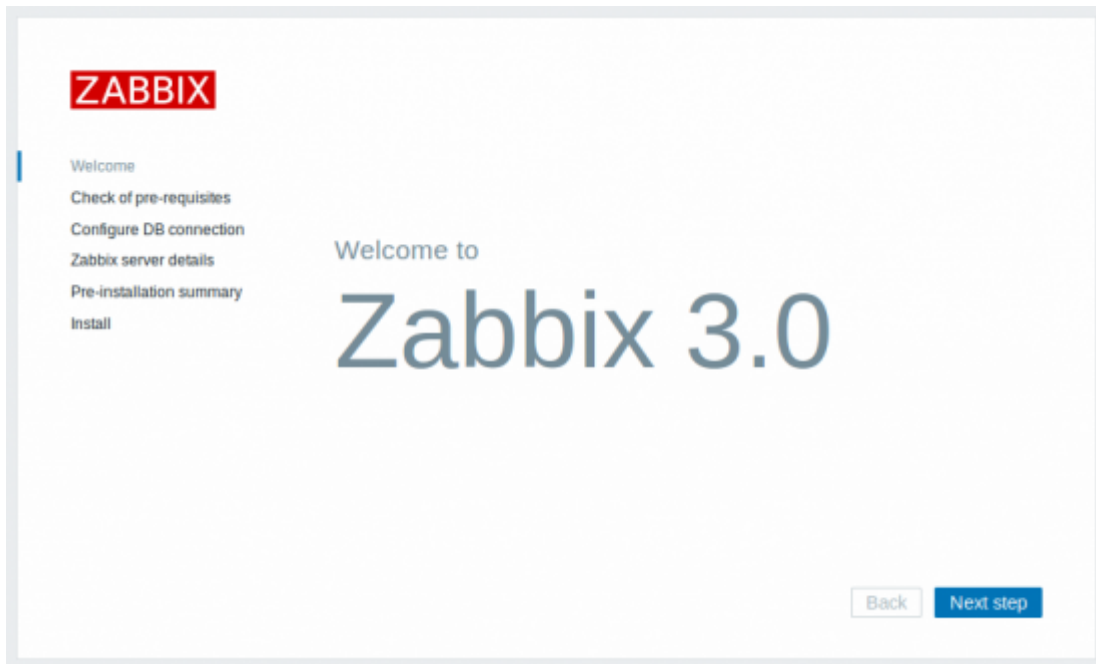

Step 2

Make sure that all software prerequisites are met.

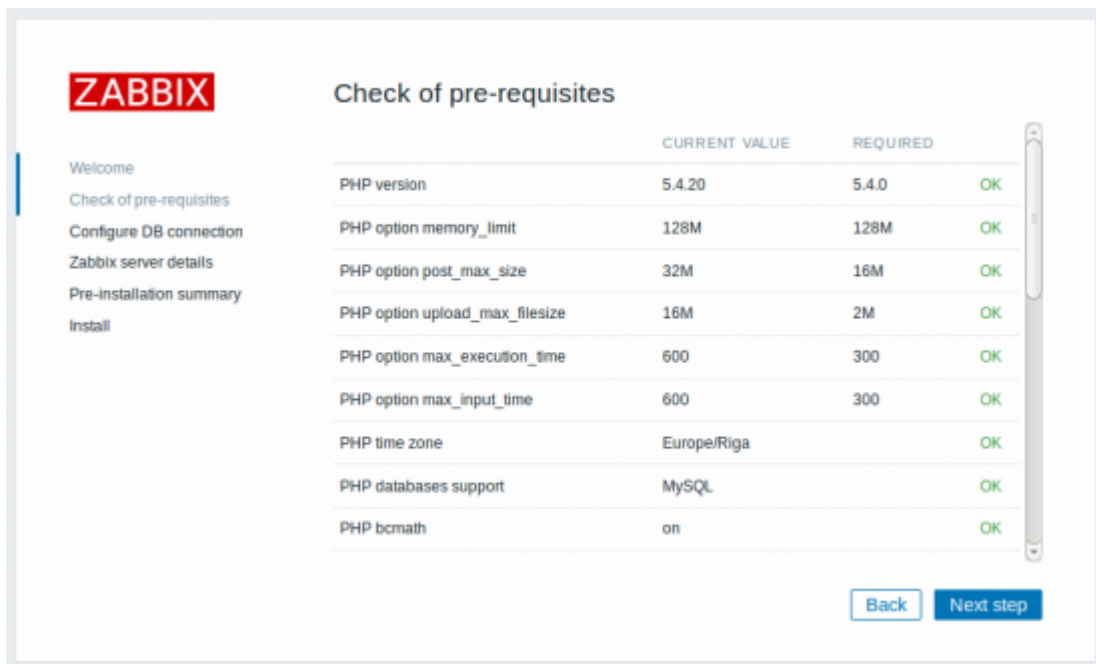

Pre-requisite	Minimum value	Description
PHP version	5.4.0	
PHP memory_limit option	128MB	In php.ini: memory_limit = 128M
PHP post_max_size option	16MB	In php.ini: post_max_size = 16M
PHP upload_max_filesize option	2MB	In php.ini: upload_max_filesize = 2M

Pre-requisite	Minimum value	Description
<i>PHP max_execution_time option</i>	300 seconds (values 0 and -1 are allowed)	In php.ini: max_execution_time = 300
<i>PHP max_input_time option</i>	300 seconds (values 0 and -1 are allowed)	In php.ini: max_input_time = 300
<i>PHP session.auto_start option</i>	must be disabled	In php.ini: session.auto_start = 0.
<i>Database support</i>	One of: IBM DB2, MySQL, Oracle, PostgreSQL, SQLite	One of the following modules must be installed: ibm_db2, mysql, oci8, pgsql, sqlite3
<i>bcmath</i>		php-bcmath
<i>mbstring</i>		php-mbstring
<i>PHP mbstring.func_overload option</i>	must be disabled	In php.ini: mbstring.func_overload = 0.
<i>PHP always_populate_raw_post_data option</i>	must be set to -1	Required only for PHP versions 5.6.0 or newer. In php.ini: always_populate_raw_post_data = -1
<i>sockets</i>		php-net-socket. Required for user script support.
<i>gd</i>	2.0 or higher	php-gd. PHP GD extension must support PNG images (<i>--with-png-dir</i>), JPEG (<i>--with-jpeg-dir</i>) images and FreeType 2 (<i>--with-freetype-dir</i>).
<i>libxml</i>	2.6.15	php-xml or php5-dom
<i>xmlwriter</i>		php-xmlwriter
<i>xmlreader</i>		php-xmlreader
<i>ctype</i>		php-ctype
<i>session</i>		php-session
<i>gettext</i>		php-gettext Since Zabbix 2.2.1, the PHP gettext extension is not a mandatory requirement for installing Zabbix. If gettext is not installed, the frontend will work as usual, however, the translations will not be available.

Optional pre-requisites may also be present in the list. A failed optional prerequisite is displayed in orange and has a *Warning* status. With a failed optional pre-requisite, the setup may continue.

If there is a need to change the Apache user or user group, permissions to the session folder must be verified. Otherwise Zabbix setup may be unable to continue.

Step 3

Enter details for connecting to the database. Zabbix database must already be created.

The screenshot shows the 'Configure DB connection' step of the Zabbix installation wizard. On the left is a navigation menu with the ZABBIX logo at the top, followed by 'Welcome', 'Check of pre-requisites', 'Configure DB connection' (highlighted), 'Zabbix server details', 'Pre-installation summary', and 'Install'. The main content area has the title 'Configure DB connection' and a sub-header 'Please create database manually, and set the configuration parameters for connection to this database. Press "Next step" button when done.' Below this are several form fields: 'Database type' is a dropdown menu set to 'MySQL'; 'Database host' is a text box with 'localhost'; 'Database port' is a text box with '0' and a note '0 - use default port'; 'Database name' is a text box with 'zabbix'; 'User' is a text box with 'zabbix'; and 'Password' is a masked text box with '*****'. At the bottom right are 'Back' and 'Next step' buttons.


Step 4

Enter Zabbix server details.

The screenshot shows the 'Zabbix server details' step of the Zabbix installation wizard. The navigation menu on the left is the same as in the previous step, but 'Zabbix server details' is now highlighted. The main content area has the title 'Zabbix server details' and a sub-header 'Please enter the host name or host IP address and port number of the Zabbix server, as well as the name of the installation (optional)'. Below this are three form fields: 'Host' is a text box with 'localhost'; 'Port' is a text box with '10051'; and 'Name' is an empty text box. At the bottom right are 'Back' and 'Next step' buttons.

Step 5

Review a summary of settings.

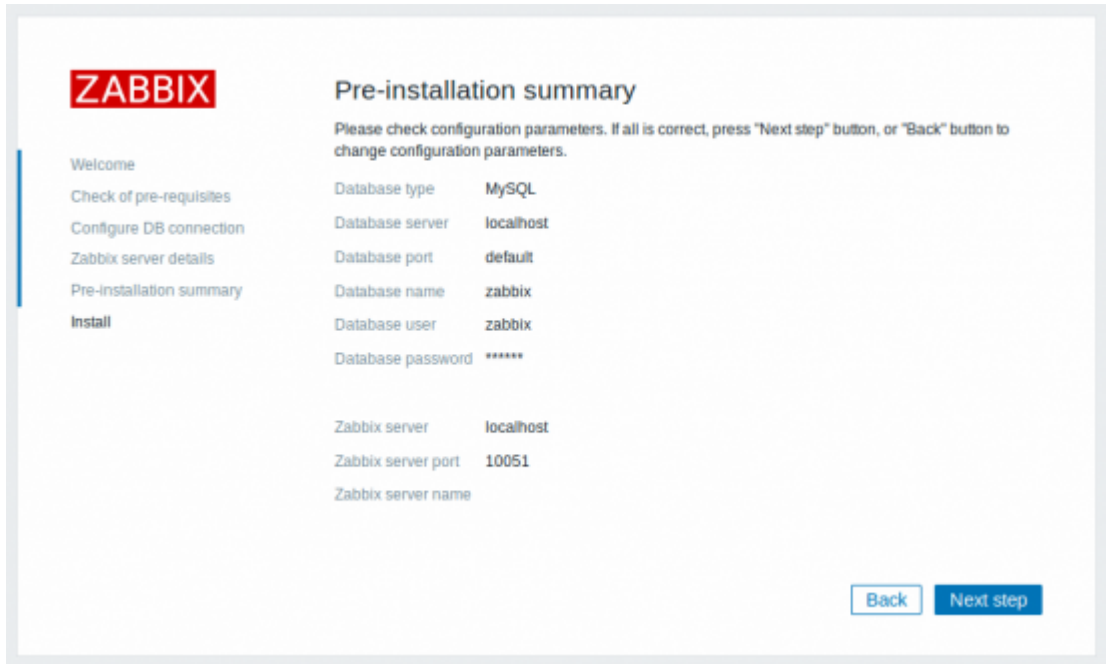

ZABBIX

Welcome

Check of pre-requisites

Configure DB connection

Zabbix server details

Pre-installation summary

Install

Pre-installation summary


Please check configuration parameters. If all is correct, press "Next step" button, or "Back" button to change configuration parameters.

Database type	MySQL
Database server	localhost
Database port	default
Database name	zabbix
Database user	zabbix
Database password	*****
Zabbix server	localhost
Zabbix server port	10051
Zabbix server name	

[Back](#) [Next step](#)

Step 6

Download the configuration file and place it under conf/.

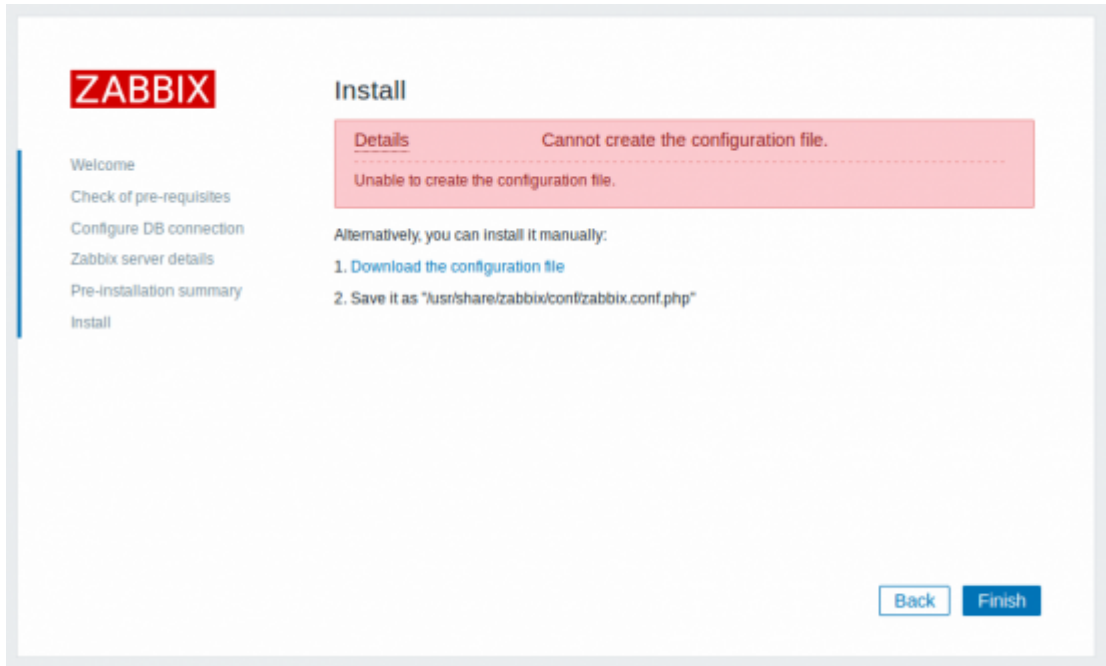

ZABBIX

Welcome

Check of pre-requisites

Configure DB connection

Zabbix server details

Pre-installation summary

Install


Details Cannot create the configuration file.

Unable to create the configuration file.

Alternatively, you can install it manually:

1. Download the configuration file
2. Save it as "/usr/share/zabbix/conf/zabbix.conf.php"


[Back](#) [Finish](#)

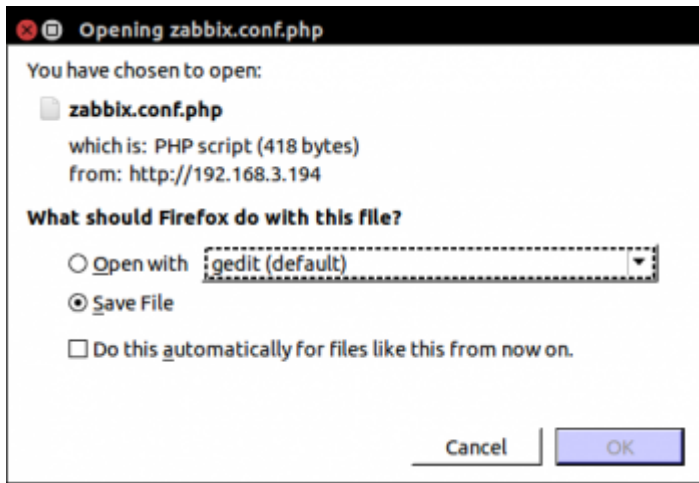

Providing the webserver user has write access to conf/ directory the configuration file would be saved automatically and it would be possible to proceed to the next step right away.


Step 7

Finish the installation.

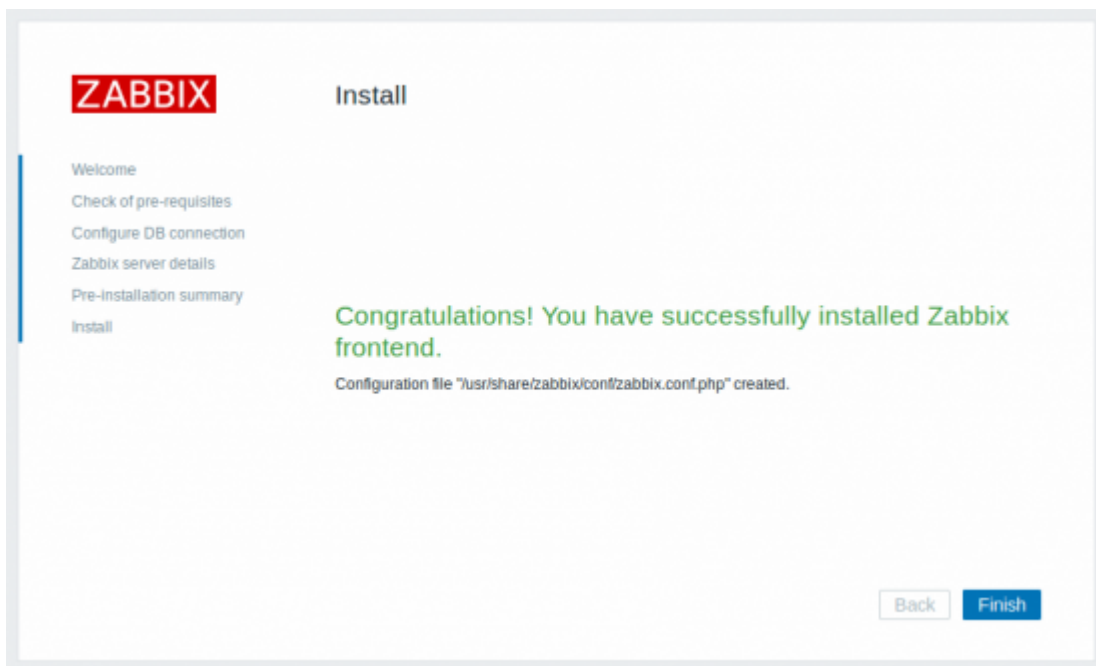

Step 8

Zabbix frontend is ready! The default user name is **Admin**, password **zabbix**.

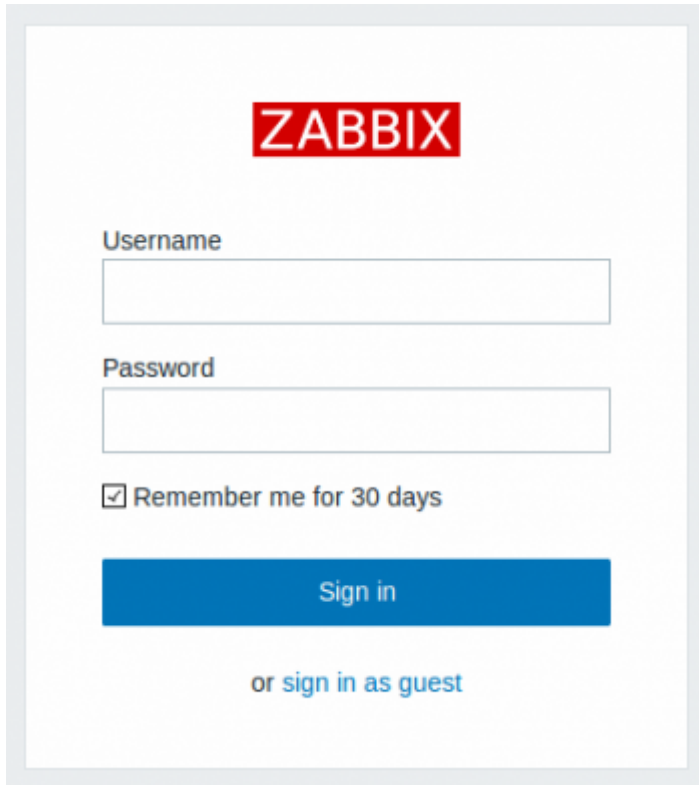

Proceed to [getting started with Zabbix](#).

Troubleshooting

See the section on [installation-specific issue troubleshooting](#).

See also

1. [How to configure shared memory for Zabbix daemons](#)

From: <https://www.zabbix.com/documentation/3.0/> - **Zabbix Documentation 3.0**

Permanent link: <https://www.zabbix.com/documentation/3.0/manual/installation/install?rev=1438761009>

Last update: **2015/08/05 07:50**

