


3 Triggers

Overview

The trigger list for a template can be accessed from *Configuration* → *Templates* and then clicking on Triggers for the respective template.

The trigger list for a host can be accessed from *Configuration* → *Hosts* and then clicking on Triggers for the respective host.

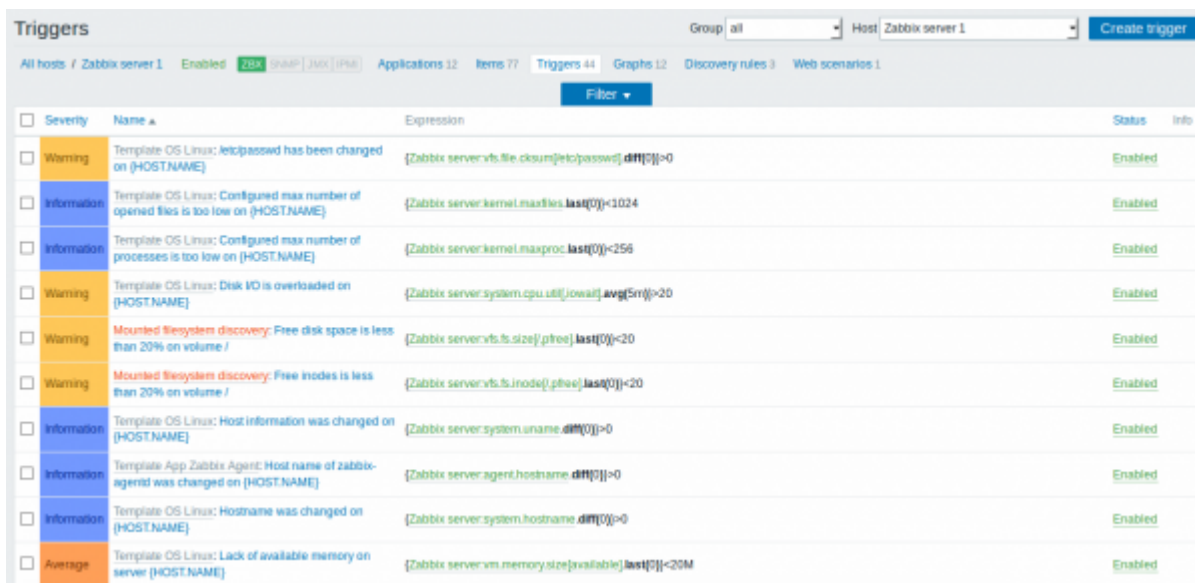

Displayed data:

Column	Description
Severity	Severity of the trigger is displayed by both name and cell background colour.
Name	Name of the trigger, displayed as a blue link to trigger details. Clicking on the trigger name link opens the trigger configuration form. If the host trigger belongs to a template, the template name is displayed before the trigger name, as a grey link. Clicking on the template link will open the trigger list on the template level. If the trigger has been created from a trigger prototype, its name is preceded by the low level discovery rule name, in orange. Clicking on the discovery rule name will open the trigger prototype list.
Expression	Trigger expression is displayed. The host-item part of the expression is displayed as a link, leading to the item configuration form.
Status	Trigger status is displayed - <i>Enabled</i> , <i>Disabled</i> or <i>Unknown</i> . By clicking on the status you can change it - from Enabled to Disabled (and back); from Unknown to Disabled (and back).
Info	If everything is fine, no icon is displayed in this column. If there are errors, a red square icon with a cross is displayed. Move the mouse over the icon and you will see a tooltip with the error description.

To configure a new trigger, click on the *Create trigger* button in the top right-hand corner.

Mass editing options

Buttons below the list offer some mass-editing options:

- *Enable* - change trigger status to *Enabled*
- *Disable* - change trigger status to *Disabled*
- *Copy* - copy the triggers to other hosts or templates
- *Mass update* - update several properties for a number of triggers at once
- *Delete* - delete the triggers

To use these options, mark the checkboxes before the respective triggers, then click on the required button.

From: <https://www.zabbix.com/documentation/3.2/> - **Zabbix Documentation 3.2**

Permanent link: https://www.zabbix.com/documentation/3.2/manual/web_interface/frontend_sections/configuration/hosts/triggers

Last update: **2016/07/18 06:06**

